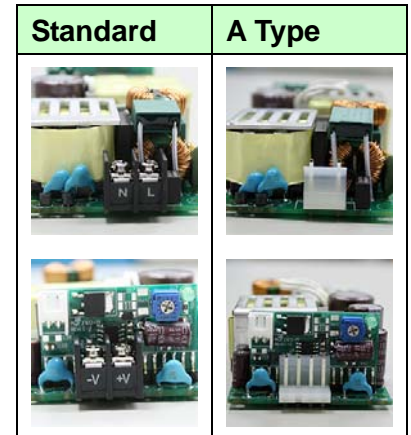


**KEY FEATURES**

- Open Frame 100W Power Supply in 4.0" x 2.0" Size
- Active PFC Function, >0.95 (230Vac), >0.98 (115Vac)
- Universal Input: 90-264 VAC
- 100W Full Load at 40°C Under Free Air Convection
- 160W with 25CFM FAN
- <0.5W No Load Input Power (except AQF160-48S)
- 12V (Aux) / 0.3A
- EN55022 Class B Meets
- Isolation Class I
- Continuous Short Circuit Protection with Hiccup Mode and Auto Recover
- 3-Year Product Warranty


**ELECTRICAL SPECIFICATIONS**

All specifications valid at normal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Model No.	AQF160-12S	AQF160-15S	AQF160-24S	AQF160-48S	
Max Output Wattage (Free air Convection) (W)	100 W				
Max Output Wattage (with 25CFM FAN) (W)	160 W				
Input	Voltage				
	90-264 VAC or 120-370 VDC				
	Frequency (Hz)				
	47-63 Hz				
	Current (Full load)				
	<2.0 A max. (115 VAC) / <1.0 A max. (230 VAC)				
Inrush Current (<2ms)					
< 35 A max. (115 VAC) / < 70 A max. (230 VAC)					
Leakage Current					
< 0.5 mA max.					
Power Factor					
PF>0.98 (115 VAC) / PF>0.95 (230 VAC) at Full Load					
Output	Voltage (V.DC.)	12V	15V	24V	48V
	Voltage Adj Range (V.DC.)	±4% Output Voltage			
	Voltage Accuracy	±2%			
	Current (Free air Convection) (A) max	8.4	6.7	4.2	2.1
	Current (with 25CFM FAN) (A) max	13.3	10.6	6.66	3.33
	Line Regulation	±1%			
	Load Regulation (10-100%)	±1%			
	Minimum Load	—	—	—	1%
	Maximum Capacitive Load (at 230 VAC)	3,000µF	2,000µF	360µF	180µF
	Ripple & Noise max.	130mV		1% Vout	
	Efficiency (at 230VAC)	90%	90%	90%	91.5%
	Hold-up Time (at 115 VAC)	10 ms min.			
Protection	Over Power Protection				
	Auto recovery, Hiccup mode				
	Over Temperature Protection				
	Auto recovery				
Over Voltage Protection					
Zener diode clamp					
Short Circuit Protection					
Auto recovery, Hiccup mode					
Isolation	Input-Output (V.AC)				
	3000V				
	Input-FG (V.AC)				
1500V					
Output-FG (V.AC)					
500V					
Environment	Operating Temperature				
	-25°C...+70°C (with derating)				
	Storage Temperature				
	-25°C...+85°C				
	Temperature Coefficient				
	±0.03%/°C ( 0~70°C ) ±0.06%/°C ( -25~0°C )				
Humidity					
95% RH					
MTBF					
>250,000 h @ 25°C (MIL-HDBK-217F, Notice 1)					
Vibration					
10~500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes.					

## ELECTRICAL SPECIFICATIONS



All specifications valid at normal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Model No.	AQF160-12S	AQF160-15S	AQF160-24S	AQF160-48S
Physical	Dimension (L x W x H) 4.1 x 2.05 x 1.42 Inches ( 103.9 x 52.1 x 29.0 mm ) Tolerance ±0.5 mm			
	Weight 220 g			
	Cooling Method Free convection			
Safety	Agency Approvals CE, UL60950-1			
EMC	EMI (Conducted & Radiated Emission) EN 55022 class B (Conductive plane to be connected to safety earth)			
	EMS (Noise Immunity) EN 55024			

## NOTE


- Ripple & Noise are measured at 20MHz of bandwidth with 0.1uF & 47uF parallel capacitor.
- Hold-up Time measured at 90% Vout.
- Main Vout must be >50% Load, 12V (Aux) / 0.3A.

## DERATING

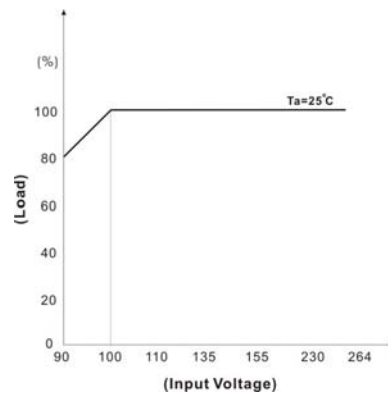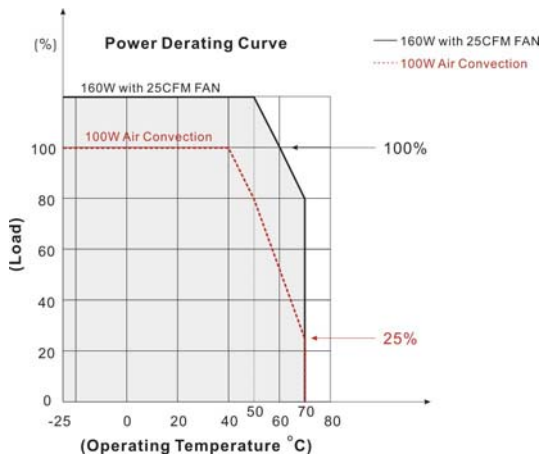

## BLOCK DIAGRAM



Single Output

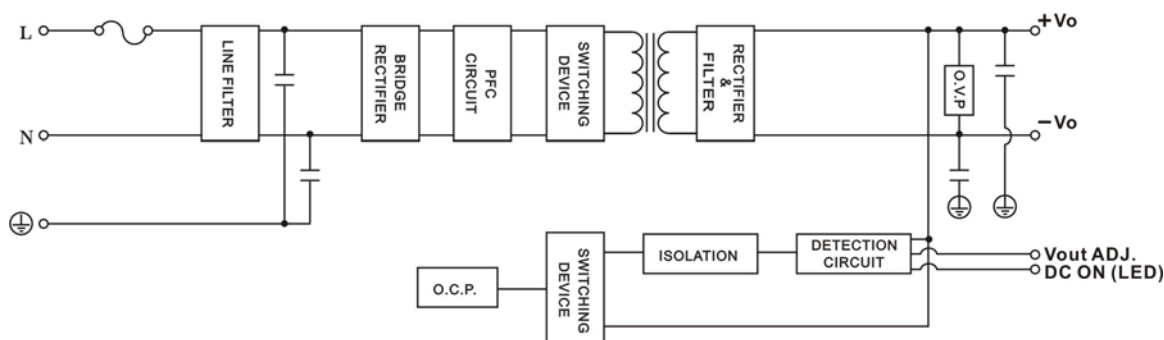

For more explicit application advices and notes, please refer to our PDF file "AC-DC Application" on our website: [www.archcorp.com.tw](http://www.archcorp.com.tw)



**MECHANICAL DIMENSION ( Top View )**

**Standard : Terminal Block**

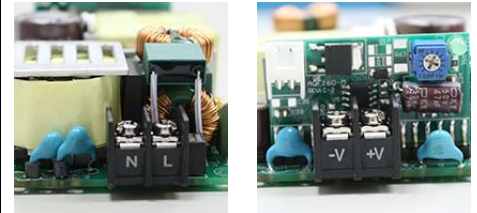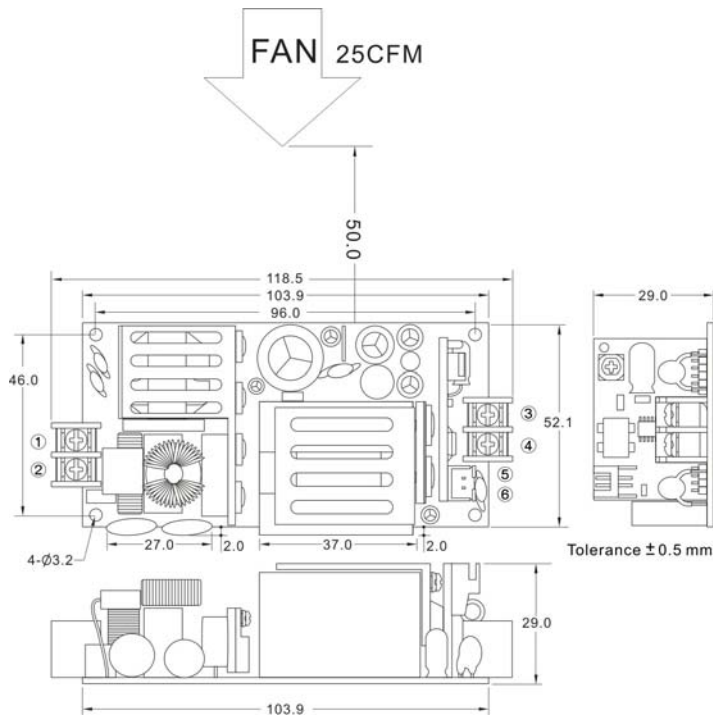

PIN#	Single
1	AC IN (N)
2	AC IN (L)
3	+DC OUT
4	-DC OUT
5	-AUX OUT
6	+AUX OUT


**A Type : Molex Series 8673 (Alex Connector Co., Ltd)**

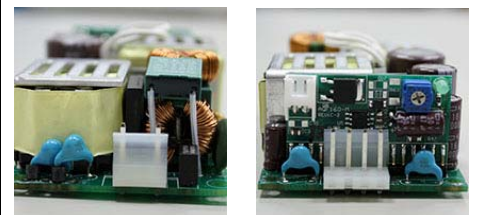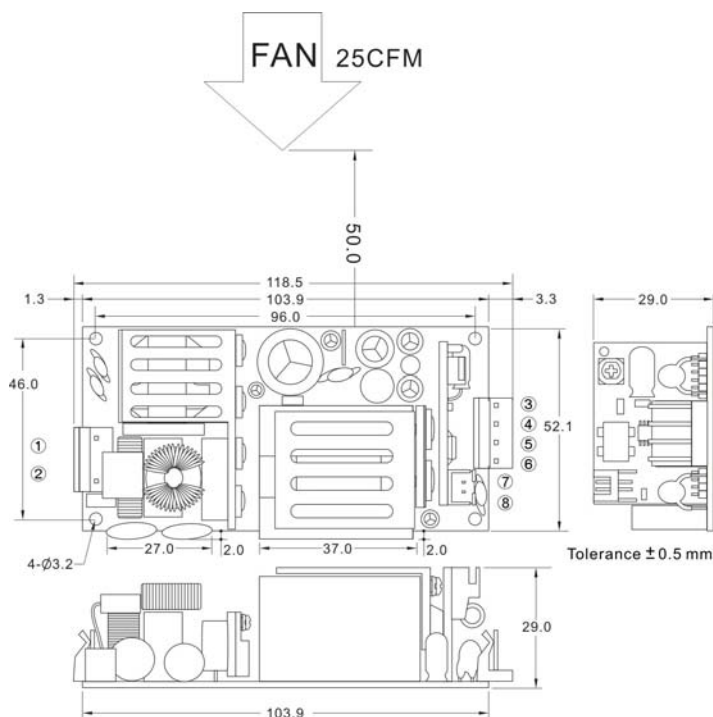


PIN#	Single
1	AC IN (N)
2	AC IN (L)
3	+DC OUT
4	+DC OUT
5	-DC OUT
6	-DC OUT
7	-AUX OUT
8	+AUX OUT

**EFFICIENCY VERSUS LOAD**
**AQF160-12S**
**VIN VS Efficiency**


Input Voltage (V)	90	115	180	230	264
Efficiency (%)	86.90	88.03	89.85	90.22	90.69

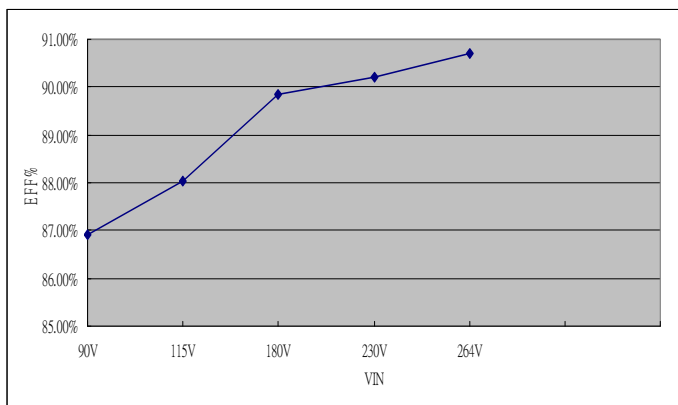
**LOAD VS Efficiency**


Load (%)	10	20	30	40	50
115V (%)	82.29	84.55	85.71	88.58	89.03
230V (%)	84.68	86.75	88.05	88.64	90.05
Load (%)	60	70	80	90	100
115V (%)	89.08	88.90	88.87	88.61	88.11
230V (%)	90.61	90.79	90.79	90.70	90.40

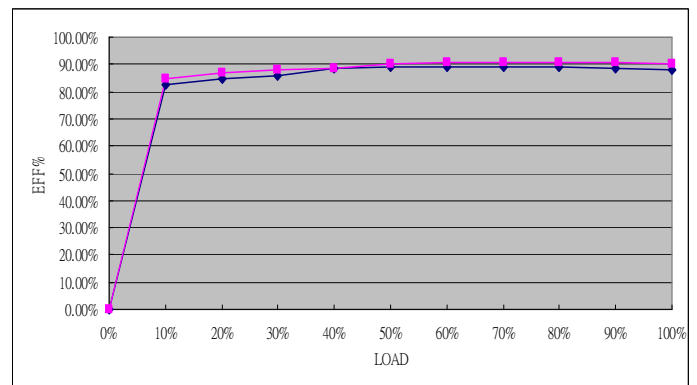
**AQF160-15S**
**VIN VS Efficiency**

Input Voltage (V)	90	115	180	230	264
Efficiency (%)	86.75	87.64	89.81	90.38	90.74

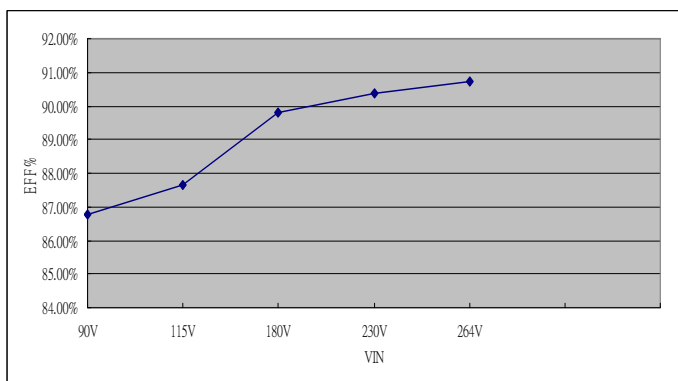

**LOAD VS Efficiency**

Load (%)	10	20	30	40	50
115V (%)	76.92	84.73	87.06	88.11	88.82
230V (%)	75.13	84.50	87.60	89.04	90.00
Load (%)	60	70	80	90	100
115V (%)	88.91	89.04	88.77	88.31	87.64
230V (%)	90.39	90.66	90.70	90.54	90.38

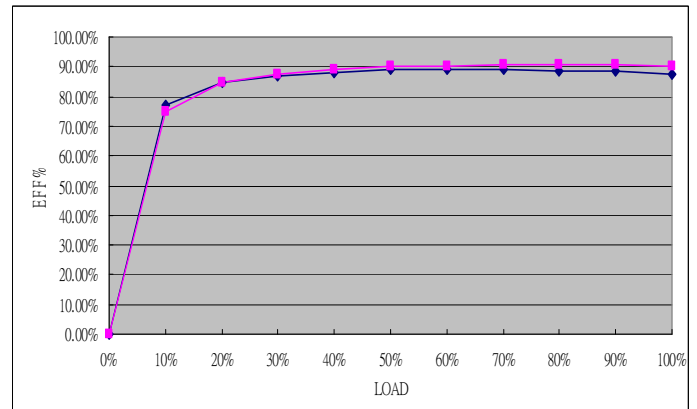


**EFFICIENCY VERSUS LOAD**
**AQF160-24S**
**VIN VS Efficiency**


Input Voltage (V)	90	115	180	230	264
Efficiency (%)	87.19	88.09	89.93	90.63	90.57

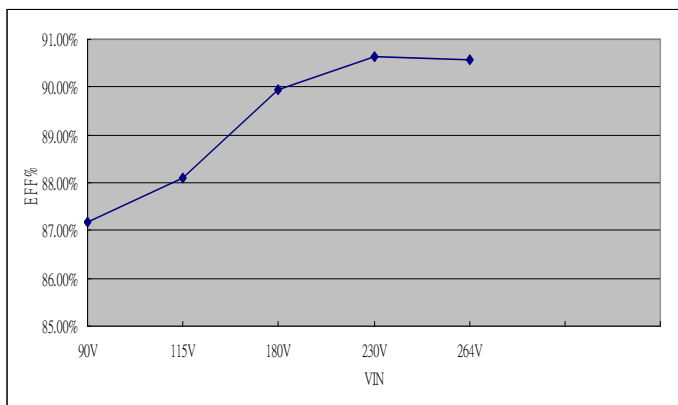
**LOAD VS Efficiency**

Load (%)	10	20	30	40	50
115V (%)	76.80	84.68	87.18	88.48	88.87
230V (%)	72.26	84.67	87.96	89.34	90.05
Load (%)	60	70	80	90	100
115V (%)	88.85	89.02	88.82	88.57	88.09
230V (%)	90.51	90.75	90.80	90.73	90.63

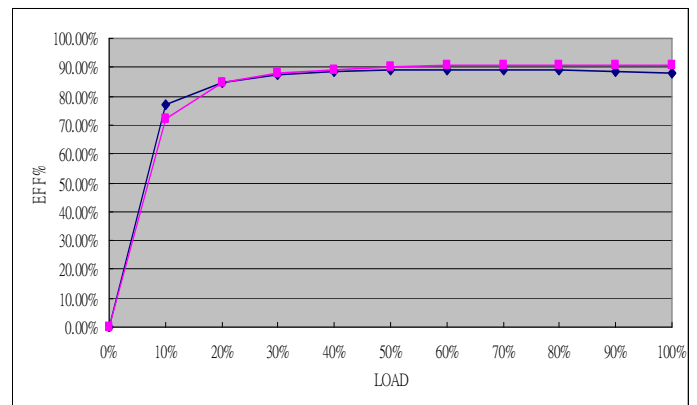
**AQF160-48S**
**VIN VS Efficiency**

Input Voltage (V)	90	115	180	230	264
Efficiency (%)	87.44	89.65	91.47	92.10	92.33

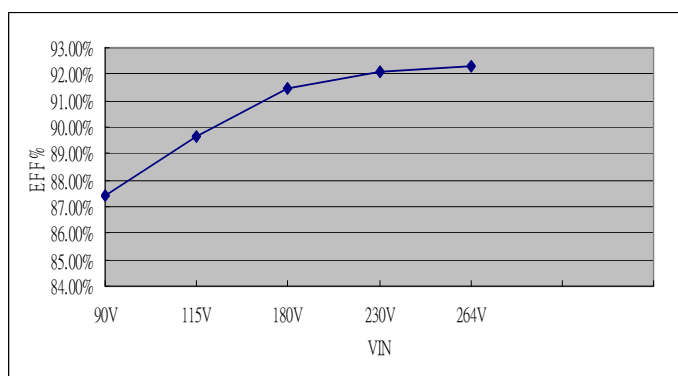
**LOAD VS Efficiency**

Load (%)	10	20	30	40	50
115V (%)	79.42	85.97	88.41	89.42	90.04
230V (%)	78.22	84.82	88.72	90.30	91.29
Load (%)	60	70	80	90	100
115V (%)	90.29	90.33	90.15	90.04	89.65
230V (%)	91.77	92.08	92.22	92.16	92.10

